

LVD

V	R	B	s 42-48 Kg/mm²																			
			0,5	0,8	1	1,2	1,5	1,8	2	2,5	3	4	5	6	8	10	12	15	20	25		
4	0,7	2,6	4	10,5																		
8	1,5	5,2	2	5,5	8	11,5	18															
10	1,7	6,5		4,1	6,5	9,5	14,5	21	26													
12	2	7,8			5,5	8	12	17,5	21,5	33,5												
16	2,7	10,4				6	9	13	16	25	36											
20	3,4	13					7,5	10,5	13	20	29	52										
25	4,2	16						8,5	10,5	16	23	41	64									
30	5	20								14	19	34	54	77								
35	6	23									17	30	46	66								
40	7	26									15	26	40	58	103							
45	7,5	29										23	36	52	91							
50	8,5	32										21	32	46	82	128						
55	9	36											30	42	75	117						
60	10	39											27	39	69	107						
65	10,8	42											25	36	63	99	142					
70	11,7	45												33	59	92	132					
75	12,5	49												31	55	86	123					
80	13,5	52												29	52	80	116	180				
85	14	55													49	76	109	170				
90	15	58													46	71	103	160				
100	17	65														41	64	93	144	256		
110	18,5	71															59	84	131	233		
120	20	78															54	77	120	213	333	
140	24	91																66	103	183	286	
170	29	110																	55	85	151	235
200	35	130																		72	128	200

C

1,75

1,55

1,35

1,1

0,9

0,65

0,45

1

σ_t

20

30

40

50

60

70


80

45



Kg/mm²

Ton

m/c

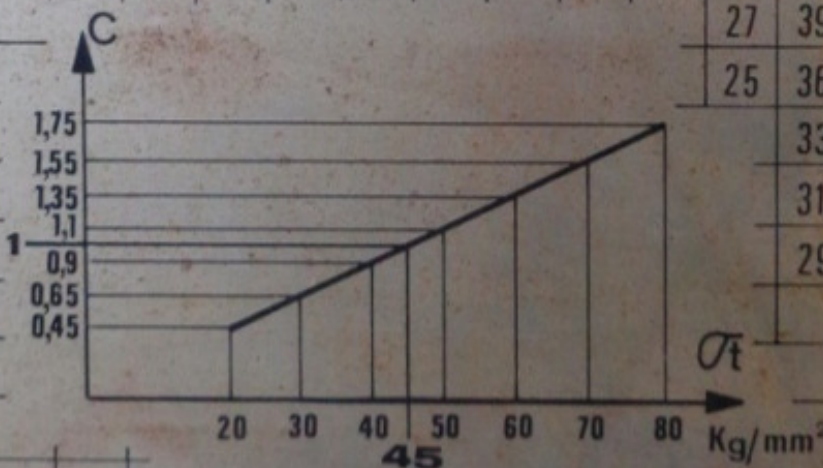

**Ton
m/c**

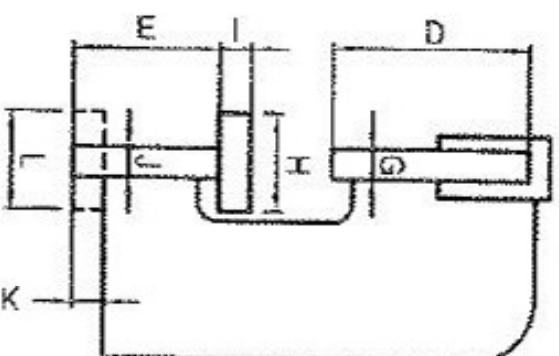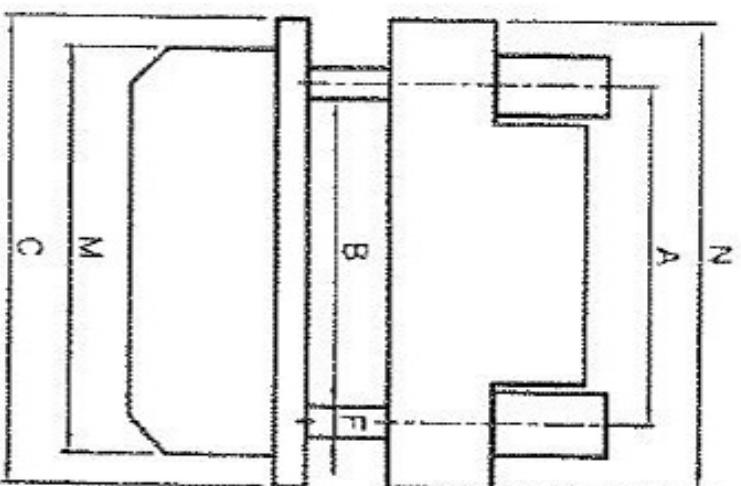

PRESS BRAKE SPECIFICATIONS

• Upper beam	length	N =mm	6000
•	height	D =mm	2340
•	thickness	C =mm	120
• Lower beam	length	M =mm	6000
•	height	E =mm	1680
•	thickness	J =mm	120
• Centreboard	height	K =mm	
•	width	L =mm	
• Table	length	C =mm	6000
•	height	I =mm	145
•	width	H =mm	300
• Distance between side frame		B =mm	5060
Cylinder distance centre to centre		A =mm	5170
Thickness side frame		F =mm	120
Pre-crowning	☐ Yes (.....mm) ☐ no		